

GTP-860[®]

7.1 MULTI-CHANNEL TUNER/PREAMPLIFIER

DIGITAL INTELLIGENCE WITH AN ANALOG SOUL



ADCOM[®]
we have the power

GTP-860[®]

BE MOVED BY HIGH-RESOLUTION TECHNOLOGY

7.1 MULTI-CHANNEL TUNER/PREAMPLIFIER

Today our entertainment comes from the digital world. DVD, High definition television, and computer technology has made available to us an incredible universe of entertainment options. But for us to experience the new media we need the digital numbers converted into our analog sensory world of sound waves and light. ADCOM multi-channel preamplifiers are the key component to turn the potential of digital entertainment into a high-resolution experience that can touch the senses and move your emotions.



▶ AVAILABLE IN BLACK

- ▶ ADCOM'S PROPRIETARY 7.1M² ALGORITHM
- ▶ PURE CLASS A BIFET ANALOG CIRCUITRY
- ▶ DOLBY PROLOGIC II DECODING
- ▶ COMPONENT VIDEO SWITCHING
- ▶ BUILT-IN RDS AM/FM TUNER
- ▶ MULTI-ZONE SOURCE SPECIFIC OUTPUTS
- ▶ HEAD PHONE INPUT WITH FRONT PANEL A/V CONNECTIONS
- ▶ FULL SET OF DIRECT ACCESS IR CONTROL FUNCTIONALITY FOR CUSTOM INSTALLATION

SURROUND PROCESSING MODES

AUTO DETECT DECODING OF DOLBY DIGITAL AND DTS SIGNALS VIA IEC 958 BITSTREAM
ADCOM'S PROPRIETARY 7.1M² ALGORITHM
DOLBY PROLOGIC II
(MOVIE, MUSIC, AND MATRIX)
5 CHANNEL STEREO
HALL MODE

VIDEO FEATURES

WIDE BANDWIDTH HIGH DEFINITION COMPONENT VIDEO SWITCHING USING OUR PURE PATH DESIGN TECHNOLOGY AND 250 MEGAHERTZ DEVICES
ON SCREEN DISPLAY FOR COMPOSITE AND S-VIDEO SIGNALS
COMPOSITE TO S-VIDEO AND S-VIDEO TO COMPOSITE SIGNAL CONVERSION

INPUTS AND OUTPUTS

2 COMPONENT VIDEO INPUTS WITH PURE PATH SIGNAL ROUTING
1 COMPONENT VIDEO OUTPUT
5 S-VIDEO INPUTS
5 COMPOSITE VIDEO INPUTS
1 MAIN S-VIDEO OUTPUT
2 TAPE S-VIDEO OUTPUTS
1 MAIN COMPOSITE VIDEO OUTPUT
2 TAPE COMPOSITE VIDEO OUTPUTS
3 COAXIAL DIGITAL INPUTS
3 OPTICAL DIGITAL INPUTS
7 STEREO ANALOG INPUTS
3 STEREO TAPE OUTPUTS
1 STEREO AUX OUTPUT THAT TRACKS MAIN SOURCE SELECTION
6 STEREO SOURCE SPECIFIC OUTPUTS
1 EXTERNAL 5.1 ANALOG INPUT FOR DVD AUDIO OR SACD
7.1 MAIN ANALOG OUTPUTS


GENERAL FEATURES

REMOVABLE IEC POWER CORD
REAR PANEL IR INPUT VIA 3.5 MM MINI JACK
12V TRIGGER OUTPUT
UNIVERSAL LEARNING REMOTE
UNIT DIMENSIONS: 17" W x 5 3/8" H x 15" D
UNIT WEIGHT 23 LBS (10.9 KG)
5 YEAR PARTS AND LABOR WARRANTY

AUDIO FEATURES



24 BIT, DUAL CORE DSP PROCESSING
24 BIT 192 KHZ ANALOG TO DIGITAL AND DIGITAL TO ANALOG CONVERSION
S/PDIF AUTO DETECT PLUG AND PLAY
PURE CLASS A BIFET ANALOG CIRCUITRY
EXTENDED DIGITAL BASS MANAGEMENT FUNCTION
BASS AND TREBLE ADJUST
LINEAR POWER SUPPLY WITH HUGE TOROIDAL TRANSFORMER

REAR PANEL VIEW AND DETAILS

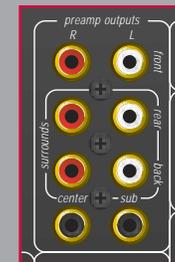

◀ 7.1 MAIN PREAMP OUTPUTS

▶ PURE PATH COMPONENT VIDEO SWITCHING

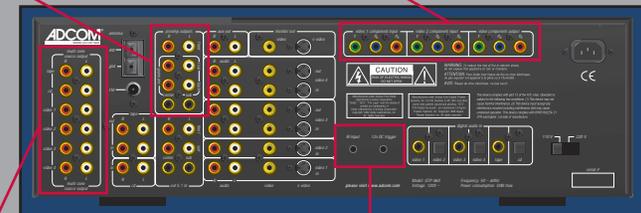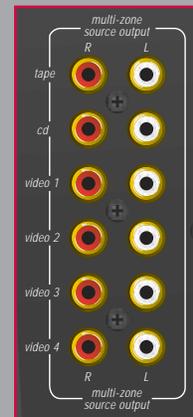

◀ SOURCE OUTPUTS DESIGNED FOR USE WITH EXTERNAL MULTI-ZONE STEREO PREAMP FOR MULTI-ROOM APPLICATIONS



◀ IR INPUT AND 12V DC TRIGGER OUT

ADCOM IS A DIVISION OF
KLEIN TECHNOLOGY GROUP, LLC

8551 EAST ANDERSON DRIVE, SUITE 105
SCOTTSDALE, ARIZONA 85255
PH: 480.607.2277 FAX: 480.348.9876
WWW.ADCOM.COM

ADCOM[®]
we have the power