

OWNER'S MANUAL

6.0, 6.1, 6.5DT Single Stereo Speaker

SPEAKER PLACEMENT

Before installing your speakers you should consider the placement carefully, taking into account the location of electrical, plumbing and other fixtures. Contact your dealer for assistance if you are not sure of the best location in your particular room environment.

Ceiling Placement : When placing your speakers in the ceiling, they should ideally be located above the primary listening area. The DT is intended to be used as a single stereo speaker in small listening environments, walk-in closets, laundry rooms, bath rooms etc. In a large area it may be necessary to place additional Speakers throughout the room to get the optimal effect.

MOUNTING SURFACE PREPARATION

NEW CONSTRUCTION - UNFINISHED CEILINGS AND WALLS

A new construction bracket, SpeakerCraft Part number BKT90611 (available from your dealer) may be installed prior to drywall application across studs or joists (up to 24" on-center) where a speaker will be located. Insulation material should be in place prior to installing drywall. After the hole is cut and the drywall is installed, the speakers are then easily installed following the instructions for mounting in "Finished Ceilings and Walls".

FINISHED CEILINGS AND WALL

Prior to the actual installation of the speaker, it will be necessary to run cables to the speaker location. See your dealer for more information on cable installation. After the cable has been properly installed, you are ready to mount the speaker. Following the simple steps listed below will result in a professional looking installation:

1. Determine the best area to mount your speakers. This area of the ceiling or wall should be free of obstructions such as electrical conduit, HVAC ducts, or water lines. This can best be determined by noting the placement of fixtures and gaining access to an attic or crawl space for further analysis of the location of such obstacles.
2. Find the studs/joists nearest the desired speaker mounting location. We highly recommend using a good stud-finder tool for this procedure. If you are lining up the speakers to some other object or molding in the room, make sure you consider the size of the baffle flange which extends beyond the mounting hole.

3. Mark the hole. A punch out template for setting the hole is provided in the box. Position the template in the desired position and pencil an outline on the wall or ceiling.

4. Cutting the hole. Caution: This is the most important part of the entire installation. If you are not certain that no obstructions exist behind the desired mounting area, you should start by cutting a small hole in the center of your penciled mounting hole with a drywall saw, cutting at a 45 degree angle towards the inside of the hole. (See Diagram 1)

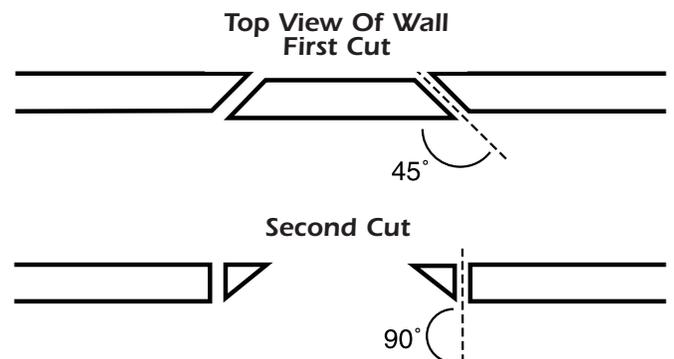


Diagram 1

Cutting the small hole at this angle will make drywall repair much easier, using the piece cut out. Once you have determined there are not obstructions in your desired mounting location, start cutting the finished hole at a 90 degree angle to the wall surface.

5. Add insulation. If the area in the Ceiling or wall is not already insulated, add an adequate amount insulation material to loosely cover the back of the speaker or to fill the wall cavity. If the insulation material used is faced with foil or paper, position the foil or paper away from the speaker.

SPEAKER INSTALLATION

The unique integral 4 foot mounting system incorporated into your DT speaker allows for a quick installation by following these easy steps.

1. Remove the grille. It may be necessary to push one or two of the mounting screws, and its attached foot, towards the Baffle and against the inside surface of the grille to force the grille out of its retaining groove.
2. Attach the speaker cable (observing the proper polarity with your amplifier, + to + and - to -). Either channel may be attached to either terminal set, however, be sure that polarity (+&-) is correct on each channel or the performance of the speaker will be seriously effected as one channel will cancel out the other. (See Diagram #2)
3. Make sure the mounting feet are turned inward to clear the opening, and insert the speaker into the ceiling or wall. Position the speaker into the hole. **Note:** The flange of the speaker is designed to flex and conform to any small imperfections in the wall surface. Tighten the 4 screws on the front of the baffle only enough to make the flange become snug against the ceiling or wall. As you tighten the screws, the feet will automatically flip into an outward position thereby clamping the drywall between the feet and the flange. (See Diagram #3) **Caution:** Over tightening may warp the baffle, crack the wall, cause the flange to distort, and make the grill difficult to install.
4. Push the grille firmly into the slot in the speaker baffle.

PAINTING THE SPEAKER

If you plan to paint your speaker, we recommend that it be done prior to installation. If you plan to paint your speaker sometime in the future, it is best to remove it by simply reversing the steps for Speaker Installation listed above. If it is necessary to paint the speaker while it is still in the wall, the paint mask provided in the carton must be installed in place of the grille while the flange is being painted with the wall. The grill can also be painted. However, great care should be taken not to clog the holes as this will greatly reduce the sound quality of the speaker. SpeakerCraft recommends only light spray painting using 5 parts thinning agent to 1 part paint. Do not paint the grille while it is attached to the speaker.

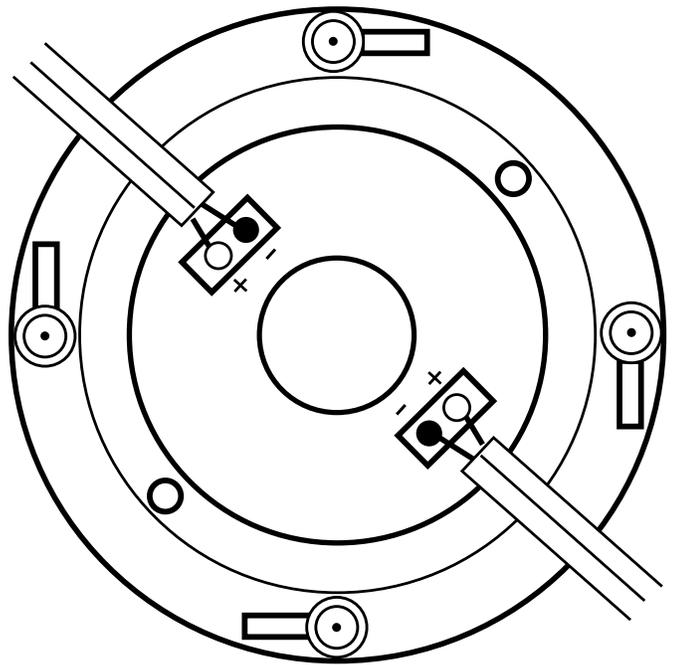


Diagram 2

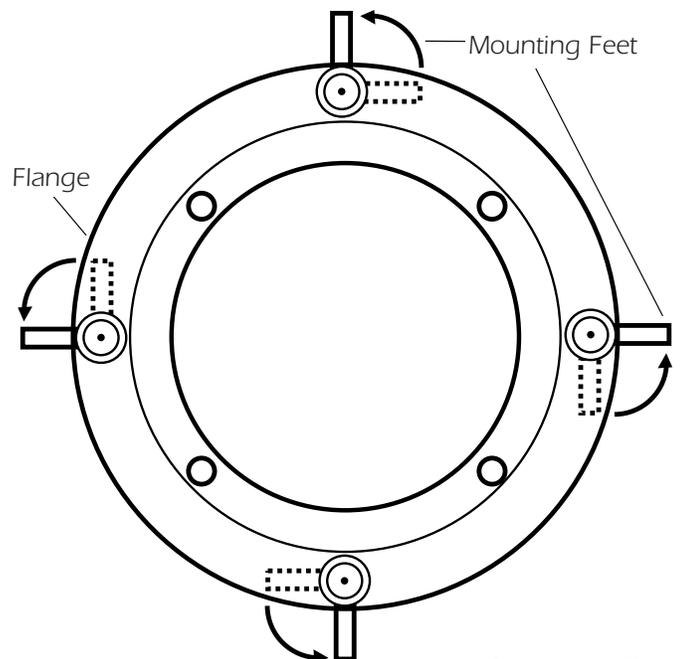


Diagram 3

SPECIAL FIRE WALL INSTALLATION

If you plan to mount your speaker in a fire rated wall or ceiling, you should purchase a SpeakerCraft in-wall enclosure, style # SE1612. This metal enclosure is designed to be used exclusively with SpeakerCraft speakers, mounts easily between studs. The enclosure comes with a standard electrical clamp type connector for connection of your speaker cable directly to the speaker. Tightening the two provided screws will ensure a sturdy "pull proof" connection.

Limited Lifetime Warranty

SpeakerCraft Inc. warrants to the original retail purchaser *only* that this SpeakerCraft product will be free from defects in materials and workmanship, provided the speaker was purchased from a SpeakerCraft Authorized Dealer.

Defective products must be shipped, together with proof of purchase, prepaid insured to the SpeakerCraft Authorized Dealer from whom they were purchased, or to the SpeakerCraft factory at the address listed on this installation instruction manual. Freight collect shipments will be refused. It is preferable to ship this product in the original shipping container to lessen the chance of transit damage. In any case, the risk or loss or damage in transit is to be borne by the purchaser. If upon examination at the Factory or SpeakerCraft Authorized Dealer it is determined that the unit was defective in materials or workmanship at any time during this warranty period, SpeakerCraft or the SpeakerCraft Authorized Dealer will, at its option, repair or replace this product at no additional charge, except as set forth below. If this model is no longer available and can not be repaired effectively, SpeakerCraft, at its sole option may replace the unit with a current model of equal or greater value. In some cases where a new model is substituted, a modification to the mounting surface may be required. If mounting surface modification is required, SpeakerCraft assumes no responsibility or liability for such modification. All replaced parts and product become the property of SpeakerCraft Inc. Products replaced or repaired under this warranty will be returned to the original retail purchaser, within a reasonable time, freight prepaid.

This warranty does not include service or parts to repair damage caused by accident, disaster, misuse, abuse, negligence, inadequate packing or shipping procedures, commercial use, voltage inputs in excess of the rated maximum of the unit, or service, repair or modification of the product which has not been authorized or approved by SpeakerCraft. This warranty also excludes normal cosmetic deterioration caused by environmental conditions. This warranty will be void if the Serial number on the product has been removed, tampered with or defaced.

This warranty is in lieu of all other expressed warranties. If the product is defective in materials or workmanship as warranted above, the purchaser's sole remedy shall be repair or replacement as provided above. In no event will SpeakerCraft be liable for any incidental or consequential damages arising out of the use or inability to use the product, even if SpeakerCraft Inc. or a SpeakerCraft Inc. Authorized Dealer has been advised of the possibility of such damages, or for any claim by any other party. Some states do not allow the exclusion or limitation of consequential damages, so the above limitation and exclusion may not apply.

All implied warranties on the product are limited to the duration of this expressed warranty. Some states do not allow limitation on the length of an implied Warranty. If the original retail purchaser resides in such a state, this limitation does not apply.

SPEAKERCRAFT OFFERS A VARIETY OF ACCESSORIES TO MAKE YOUR INSTALLATION OF THESE SPEAKERS AND OTHER SPEAKERCRAFT PRODUCTS EASY, ECONOMICAL, AND PROFESSIONAL. CONTACT YOUR AUTHORIZED SPEAKERCRAFT DEALER FOR MORE INFORMATION.

SPEAKER SPECIFICATIONS

	6.0DT	6.1DT	6.5DT
System Description:	2 tweeters co-axially mounted onto a dual voice coil woofer	2 tweeters co-axially mounted onto a dual voice coil woofer	2 tweeters co-axially mounted onto a dual voice coil woofer
High Frequency Drivers: Liquid Cooled Tweeters	Dual 1/2" Polyamide Dome,	Dual 1/2" Polyamide Dome, Liquid Cooled Tweeters Mounted onto WavePlane	Dual 1" Silk Dome, Liquid Cooled Tweeters Mounted onto WavePlane
Low Frequency Drivers:	6.5" Polypropylene Cone Dual Voice Coil With Urethane Surround	6.5" Polypropylene Cone Dual Voice Coil With Rubber Surround	6.5" Polypropylene Cone Dual Voice Coil With Rubber Surround
Impedance:	8Ω	8Ω	8Ω
Sensitivity (1 Watt/1 Meter):	90db	90dB	90dB
Frequency Response:	60Hz - 20kHz	60Hz - 20kHz	58Hz - 20kHz
Recommended Amplifier Power:	5-50 watts (undistorted)	5-50 Watts (undistorted)	5-60 Watts (undistorted)
Shipping Weight:	5 lbs	5 lbs	5 lbs

In our attempt to constantly improve, our products features and specification are subject to change without notice.

SHOULD YOU HAVE ANY QUESTIONS REGARDING THIS, OR ANY OTHER SPEAKERCRAFT PRODUCT, PLEASE CALL OUR TOLL FREE SERVICE HOTLINE AT 1-800-448-0976. WE ARE AVAILABLE TO ASSIST YOU EVERY WEEK DAY, EXCEPT HOLIDAYS, BETWEEN THE HOURS OF 7:00AM AND 5:00PM (Pacific Time).

SpeakerCraft Inc. 1650 Seventh Street, Riverside, CA 92507 ▪ (800) 448-0976 ▪ FAX (909) 787-8747